
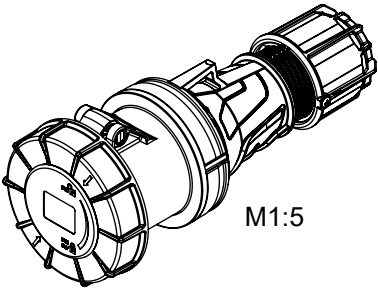


**Maßskizze / dimensional drawing**

Benennung: **Kupplung 63A IP66/67 POWER TWIST**

description: **Connector 63A IP66/67 POWER TWIST**

Teilenummer / part number: **233-\*, 234-\*, 235-\***

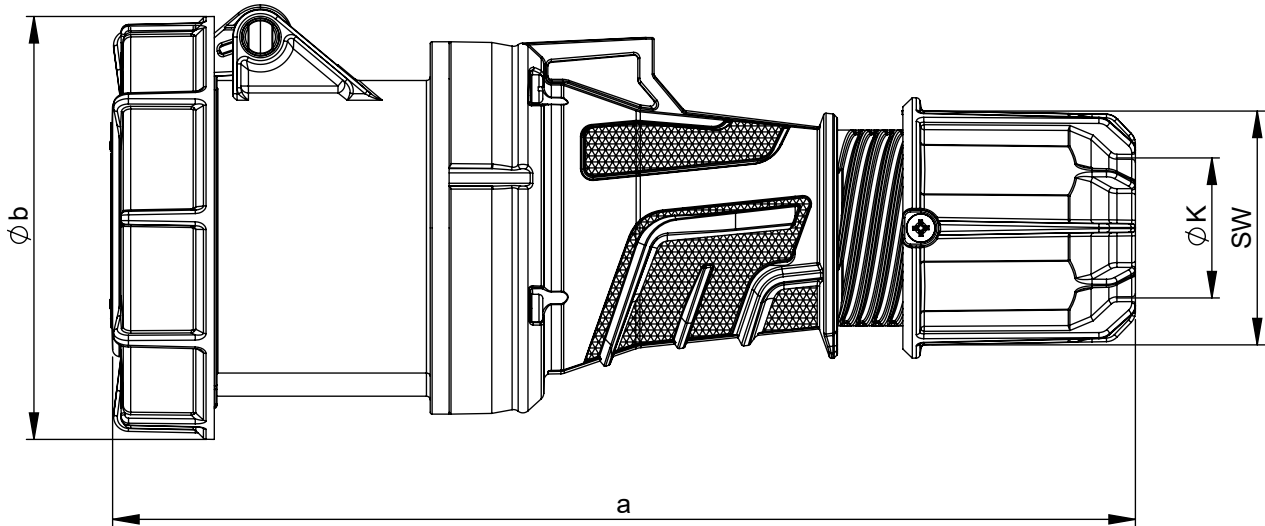


Ampere	63		
Pole	3	4	5
a [mm]	269	269	269
b [mm]	114	114	114
K [mm]	14,5-36	14,5-36	14,5-36
SW [mm]	61	61	61

## PCE data sheet

article#	<b>235-6</b>
article description	<b>CEE-connector 63A 5p 6h IP67 POWER TWIST</b>
description long	CEE-connector 63A 5p 6h IP67 POWER TWIST housing material: PA6 rated current: 63A number of poles: 5 (3P+N+PE) clock-position: 6h rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws IP protection class: IP66/IP67
GTIN (EAN)	9003399042294
country of origin	AT
customs number	85366990
packaging quantity	2
minimum order quantity	2

ETIM 7.0	EC001320
IEC-amperage	63 A
Number of poles	5
Voltage acc. EN 60309-2	400 V (50+60 Hz) red
Clock hour position	6 h
Identification colour	Red
RAL-number	7046
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Straight
Cable entry	Swivel
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated

a	269 mm
b	114 mm
K (cable Ø)	14,5-36 mm
SW	61 mm
wire flexible	6-16 mm <sup>2</sup>
contact screws	200 Ncm
strain relief	1500 Ncm
dismantling length	100 mm
stripping length	15-18 mm

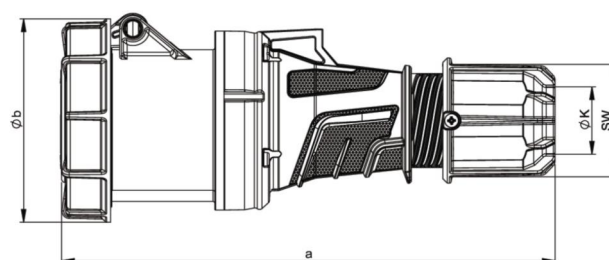



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)

**Maßskizze / dimensional drawing**

Benennung: **Stecker 63A IP66/67 POWER TWIST**

description: **Plug 63A IP66/67 POWER TWIST**

Teilenummer / part number: **033-\*, 034-\*, 035-\***

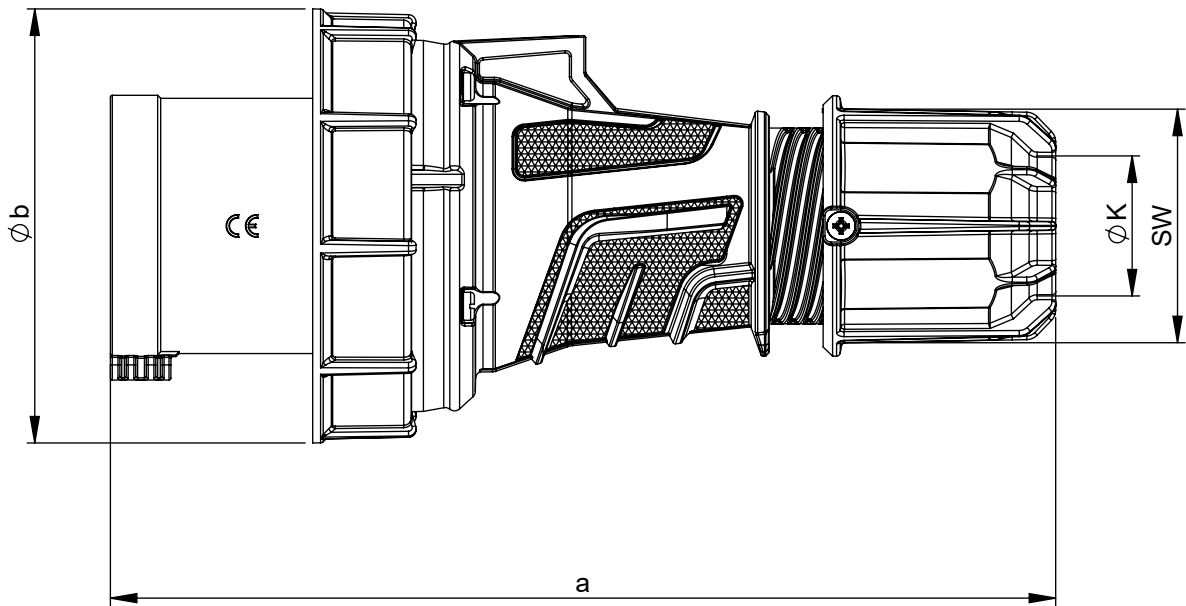


Ampere	63		
Pole	3	4	5
a [mm]	250	250	250
b [mm]	115	115	115
K [mm]	14,5-36	14,5-36	14,5-36
SW [mm]	61	61	61

## PCE data sheet

article#	<b>035-6</b>
article description	<b>CEE-plug 63A 5p 6h IP67 POWER TWIST</b>
description long	CEE-plug 63A 5p 6h IP67 POWER TWIST housing material: PA6 rated current: 63A number of poles: 5 (3P+N+PE) clock-position: 6h rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz contacts: brass nickel plated, with pilot pin connection technology: frame terminals with screws IP protection class: IP66/IP67
GTIN (EAN)	9003399040061
country of origin	AT
customs number	85366990
packaging quantity	2
minimum order quantity	2

ETIM 7.0	EC000140
IEC-amperage	63 A
Number of poles	5
Voltage acc. EN 60309-2	400 V (50+60 Hz) red
Clock hour position	6 h
Identification colour	Red
RAL-number	7046
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Cable entry	Swivel
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

a	250 mm
b	115 mm
K (cable Ø)	14,5-36 mm
SW	61 mm
wire flexible	6-16 mm <sup>2</sup>
contact screws	200 Ncm
strain relief	1500 Ncm
dismantling length	100 mm
stripping length	15-18 mm

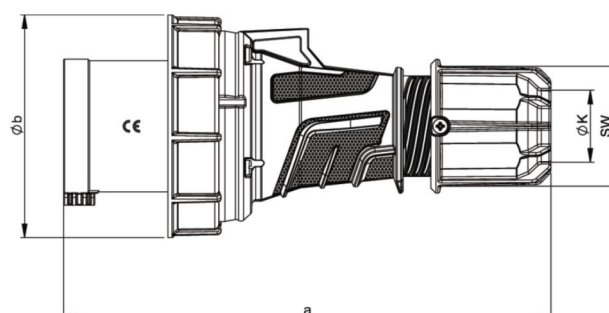

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)